

## FLAT GATE TYPE MF - H

### COMPONENT FOR SILO AND CONTAINER SYSTEMS WITH OPTIMAL SEALING – HAND DRIVEN

The **Flat Gate Type MF-H** is used to seal silo and container systems. It guarantees optimal sealing when storing dusty or granulated bulk materials up to 8 mm grit size.

#### Areas of Application

- The modular construction of the gate valve allows the subsequent installation of various drive configurations (hand driven, pneumatic, electronic motor-driven actuation) using the identical base frame.
- The gate plate is led on two-sided rollers.
- The labyrinth-like installed shrink-wrap plates as well as a circulating threefold packing box gasket provide an optimal seal.
- If required, the packing box gasket can be adjusted easily from outside.


#### Details / Explanation

- Frame: S235, coated
- Plate: S235, primed
- Plate sealing: Felt, oil impregnated

#### Finish

**Dimensions Flat Gate Type MF - H**

Nominal Width	200 x 200	300 x 300	400 x 400
A	200	300	400
B	300	400	500
L1	895	1095	1295
L2	740	890	1040
L3	465	565	665
L4	200	300	400
L5	535	685	835
L6	715	915	1115
K	150	250	300
M	55	55	80
Ø D	250	250	300

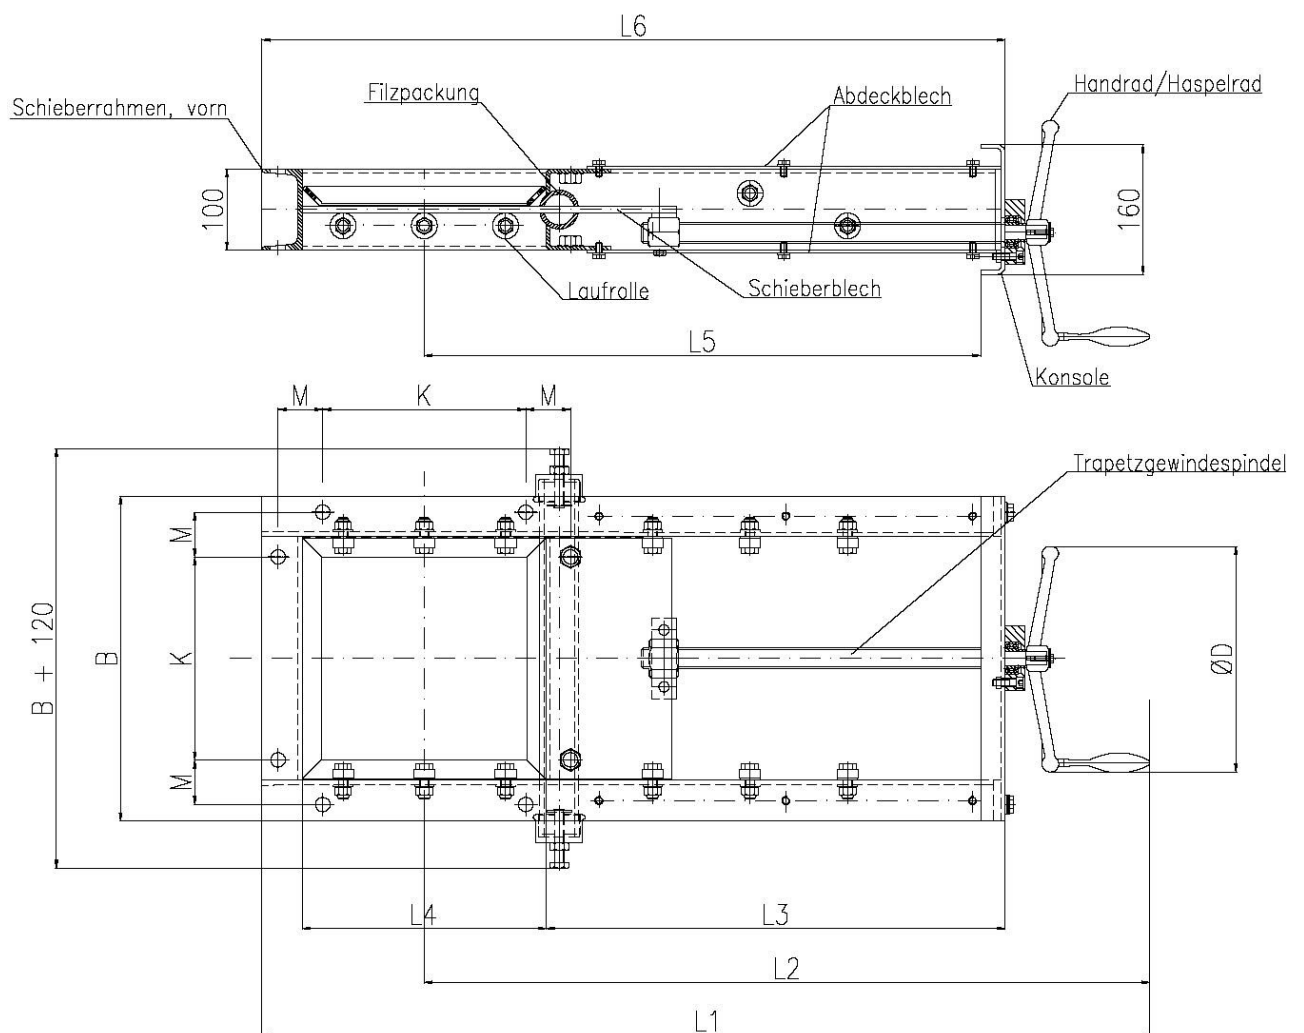

**Technical Data Flat Gate Type MF - H**

Nominal Width	200 x 200	300 x 300	400 x 400
Weight	approx. 40 kg	approx. 46 kg	approx. 55 kg

**Article number**

Nominal Width	200 x 200	300 x 300	400 x 400
Article number	712 10 260	712 10 258	712 10 259